



CLEANSOURCE® PLUS MMS MODULAR UPS SYSTEMS

50Hz | 300kW TO 2400kW | 380/400/415V
FLYWHEEL TECHNOLOGY



CLEANSOURCE® PLUS MMS MODULAR UPS SYSTEMS

Overview

CLEANSOURCE® PLUS MMS Modular UPS System offers a wide range of modular and redundant back-up power systems from 300kW to 2400kW.

The built-in flywheel energy storage takes up less than half the footprint of battery-based systems, delivers efficiency up to 98% and lowers total cost of ownership by up to 40% over the life of the product.


This field-proven technology is based on a highly fault tolerant IGBT architecture designed to protect all critical loads, such as data centers, industrial processes and health care applications. Stored energy will provide ride-through up to 2 minutes depending upon configuration, making the CLEANSOURCE® PLUS MMS a clear alternative to modular static UPS systems reliant on battery storage.

The CLEANSOURCE® PLUS MMS Modular UPS System has more than enough energy storage for diesel starting and synchronization, even when paralleling generating sets. Elimination of batteries saves space and weight, reduces site testing and maintenance and removes the need for routine replacement after a few years of service life.


Parallel Online Architecture

The CLEANSOURCE® PLUS MMS Modular UPS is based on Active Power's Parallel Online Architecture which provides excellent isolation between input and output, while delivering Class 1 voltage regulation and dynamically cancelling effects of non-linear load harmonics.

This topology continuously provides online power protection to your operation, creating a clean sinusoidal output waveform and protecting critical operations against all nine IEEE power disturbances in a power dense, reliable, and energy-efficient package.

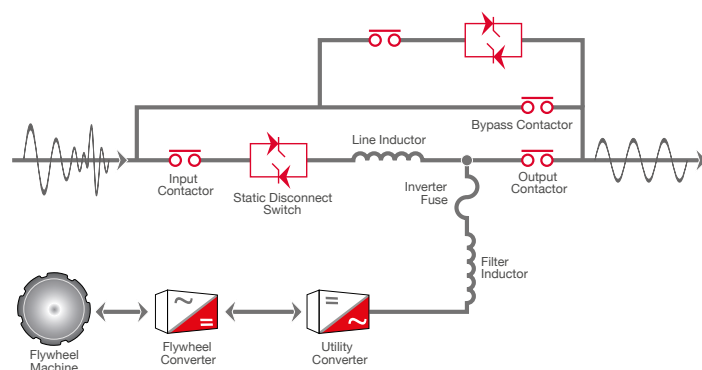

FLYWHEEL TECHNOLOGY

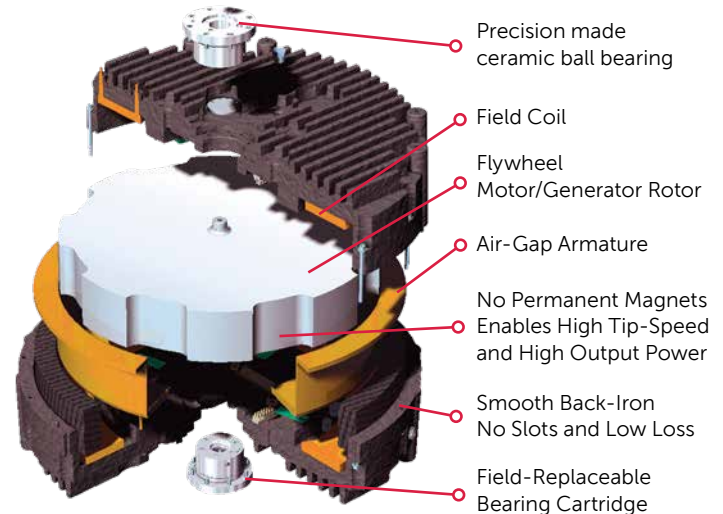

- ▶ STORES 6.2 MJ OF ENERGY
- ▶ UP TO 2 MINS. OF RUN-TIME (LOAD DEPENDENT)
- ▶ WIDE OPERATING TEMPERATURE RANGE FROM 0°C TO 40°C
- ▶ HIGH DENSITY, HIGH EFFICIENCY DESIGN

KEY BENEFITS AND FEATURES

- ⦿ UP TO 98% EFFICIENT
- ⦿ HALF THE SPACE OF LEGACY BATTERY-BASED UPS
- ⦿ FIELD EXPANDABLE
- ⦿ REDUNDANT FANS AND CONTROL POWER UNITS
- ⦿ LOWER COOLING REQUIREMENTS
- ⦿ LOWER MAINTENANCE AND SERVICE
- ⦿ COST-EFFECTIVE INSTALLATION
- ⦿ COLOUR LCD TOUCH SCREEN DISPLAY
- ⦿ REMOTE MONITORING
- ⦿ BUILT-IN POWER FACTOR CORRECTION
- ⦿ GENERATOR COMPATIBILITY
- ⦿ DUAL INPUT AND INTEGRATED MAINTENANCE BYPASS OPTION
- ⦿ SEISMIC PROVISIONS – CONSULT FACTORY
- ⦿ 20-YEAR DESIGN LIFE
- ⦿ 300kW BUILDING BLOCKS EXPANDABLE TO 2400kW

40%

TCO SAVINGS

PERMANENT ENERGY STORAGE

UP TO 98% ENERGY-EFFICIENT

LESS EXPENSIVE TO INSTALL
AND COMMISSION

12x

LESS LIKELY TO FAIL

MOST RELIABLE ENERGY
STORAGE SYSTEM

MINIMIZE RISK AND DISRUPTION
FROM MAINTENANCE
AND REPLACEMENT

9x

LESS CARBON EMISSIONS

90% LESS CARBON USED
IN UPS MANUFACTURE

OVER 40% LESS CARBON
EMITTED OVER 20 YEARS

CLEANSOURCE® PLUS MMS combines a competitive initial cost with lower ongoing operational expense – up to 40% lower than traditional UPS over 20 years. The result is a dramatic TCO benefit for your application, with net savings.

► SUPERIOR ENERGY EFFICIENCY

Over 96% efficient at 40% load.

► REDUCED COOLING NEEDS


No need for dedicated cooling for batteries

► LOWER MAINTENANCE REQUIREMENTS

Routine annual check-up and bearing change every third year.

► NO BATTERY CHANGES

Integrated flywheel with 20-year life.

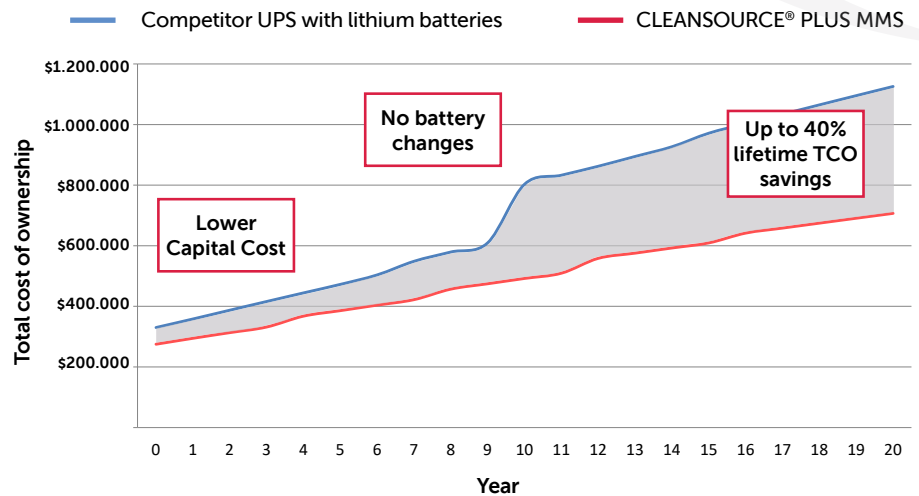

Modular and Scalable Architecture

CLEANSOURCE® PLUS MMS Systems are modular and capable of multiple redundancy levels. Customers may readily expand their systems in line with their own growth needs by adding further modules over time. Each system consists of an input/output cabinet (IOC), a system cabinet (SC) and the ability to connect up to four 300kW modules with built-in wireway. In total, 8 modules can operate in a single system, providing up to 2400kW of high efficiency, battery-free UPS power. CLEANSOURCE® PLUS MMS Series UPS can be configured from 300kW up to 2400kW.



50Hz | 300-2400 kW | 380/400/415V

PRODUCT SPECIFICATIONS

MODEL	PLUS MMS 300	PLUS MMS 600	PLUS MMS 900	PLUS MMS 1200			
RATING							
Maximum kVA	333	667	1000	1333			
Maximum kW	300	600	900	1200			
INPUT							
Voltage ¹	380/400/415 VAC 3-phase, 4-wire plus ground						
Voltage Range ²	+10% / -15% (programmable)						
Frequency	50/60 Hz +/- 10% maximum (programmable) +/- 3% (default)						
Power Factor	0.99 at rated load and nominal voltage						
Harmonic Current Distortion	Linear load	<2% at 100% load					
	Non-linear ³	<8% at 100% load					
Current – Nominal (380 VAC)	472A	944A	1417A	1889A			
Current – Nominal (400 VAC)	449A	897A	1346A	1794A			
Current – Nominal (415 VAC)	432A	865A	1297A	1730A			
Current – Max. Continuous	530A	1060A	1590A	2120A			
Current – Max. Non-Continuous	560A	1120A	1680A	2240A			
Surge Withstand	Meets IEEE 587/ANSI C62.41						
Walk-in	1 to 15 seconds (programmable)						
OUTPUT							
Voltage	380/400/415 VAC 3-phase, 4-wire plus ground						
Voltage Regulation	Steady State	+/-1% for +/-10% input					
	Flywheel Mode	+/-1% steady state					
	Transient	+/-1% within 50 mSec for 100% load step					
Voltage Distortion ³	<1% linear loads and <5% for 100% non-linear loads						
Frequency	50/60Hz (mains synchronized) (normal operation +/- 0.2% free running)						
Slew Rate	Adjustable from 0.2Hz/second to 3.0Hz/second						
Current – Nominal (380 VAC)	506A	1013A	1519A	2026A			
Current – Nominal (400 VAC)	481A	962A	1443A	1925A			
Current – Nominal (415 VAC)	464A	927A	1391A	1855A			
Overload Capability-Mains Operation		Cont. 105%	10 min <110%	5 min <125%	1 min <150%	10s <200%	lmd. >200%
Efficiency – Energy Storage Online	97.5%						
ENERGY STORAGE							
Type	Integrated Steel Flywheel spinning at 10,000RPM						
Flywheel Run Time (% Load)		100% 20s	75% 27s	50% 40s	25% 81s		
Flywheel Recharge Time ⁴	< 3 min (nominal) at 65kW						
GENERAL							
Internal Maintenance Bypass Panel	Yes (optional)						
N+1 Redundant Module	Yes (optional)						
OSHPD Seismic Rated	Consult factory						
ENVIRONMENTAL							
Audible Noise	<75 dBA at 1 metre						
Operating Temperature	32 to 104°F (0 to 40°C)						
Storage Temperature	-13 to 158°F (-25 to 70°C)						
Humidity	5% to 95% (non-condensing)						
Altitude	Up to 3,000 feet (914m)/1.2°C derating for every 1,000ft (304.8m) above 3,000ft (914m)						
Emissions and Immunity	EN 62040-2						
Heat Rejection – Online	7.7kW/26,289BTU/Hr	15.4kW/52,578BTU/Hr	23.1kW/78,867BTU/Hr	30.8kW/105,156BTU/Hr			
PHYSICAL DATA							
Height	78.0in/1,981mm Excl. Wireway. 96.0in/2,438mm Inc. Wireway						
Width	127.0in/3,226mm	170in/4,318mm	213.0in/5,410mm	256.0in/6,502mm			
Depth	34.0in/865mm	34.0in/865mm	34.0in/865mm	34.0in/865mm			
Weight	6,750lbs/3,063kg	11,250 lbs/5,103kg	15,750lbs/7,144kg	20,250lbs/9,185kg			
Cable Entry	Top or Bottom						
Safety	EN 62040-1						

¹ From grounded WYE source

² +/-10% at 380VAC

³ EN 62040-3

⁴ kW recharge value is per flywheel.



Active Power Inc. 2128 West Braker Lane, Austin, TX 78758

activepower.com

Active Power Inc. is a division of the Pillar group

Pillar Australia | Pillar China | Pillar France | Pillar Germany | Pillar India | Pillar Italy | Pillar Singapore | Pillar Spain | Pillar UK | Pillar USA